

## WORKING DIMENSIONS

Length:	5.3 m (16 ft. 5 in.)
Width:	4.3 m (14 ft. 1 in.)
Height:	3 m (9 ft. 10 in.)
Weight:	5,5 tons

## INTERNATIONAL SHIPPING DIMENSIONS

Shipping Method:	One (1) containers 40'
------------------	------------------------

## FLOTATION

Dimensions:	Two pontoons 4.5 m x 1 m x 1.25 m with Central Platform
Draft:	80 – 90 cm

## WORKING CAPACITY

Capacity:	150 m <sup>3</sup> /h – 700 m <sup>3</sup> /h (660 gpm – 3082 gpm)
Head:	70 m – 20 m (230 ft. – 65 ft.)
Working Depth:	Up to 100 m (328 ft.)

## SUBMERSIBLE DREDGE PUMP

Type:	EL1204A/B/HC/HH
Discharge Diameter:	100 mm – 250 mm (4in. – 10 in.)
Impeller Diameter:	400 mm (1 ft. 4 in.) / 3 blades, closed
Max. Solid Handling:	60 mm (2.36 in.) / 90 mm (3.5 in.)
Speed:	1450 r.p.m.
Phases	3 Phases
Frequency	50 Hz / 60 Hz
Voltage	On request
Insulation Class	H
Power:	90 kW (120HP)

## POWER SOURCE

Type:	On-shore Electric Power Generator
Minimum required Power	275 kVA

## JET RING SYSTEM

Water capacity:	60 m <sup>3</sup> /h
Pressure:	6 bar – 7 bar
Drive:	On-barge horizontal high pressure pump

## PROPULSION

Primary System:	Four (4) 50 m steel Winches (available up to 110 m)
Secondary System:	Helix Propeller (OPTIONAL)

## ELECTRICAL SYSTEM

Voltage:	On request
----------	------------

## SAFETY

Features	Completely remote controlled dredge with no operators on-board. The dredge is controlled from up to 500m away from a remote control, greatly reducing the risk to the operators.
----------	--

## ANTI-CORROSION FEATURES

Includes:	Hull below deck painted with marine-grade epoxy. Hull above deck painted with polyurethane epoxy and remaining components coated with heavy-duty powder coating all suitable for salt-water service.
-----------	--

EQUIPMENT	BASIC	STANDARD	FULL OPTIONAL	HIGH DEPTH
Winches for moving	X	X	X	X
Night time operating lights	X	X	X	X
Electric Hoist	X	X	X	X
Control Panel	X	X	X	X
Temperature Sensor		X	X	X
Pond Bottom Liner Protection		X	X	X
Jet-Ring System		X	X	X
Digital Depth Gauge		X	X	X
Power Consumption gauge		X	X	X
Moisture Sensor			X	X
Dredge GPS System			X	X
Helix Propeller			X	X
Maintenance Cabin			X	
Pressure Compensator				X

ANTI-CORROSION PACKAGE AVAILABLE ON REQUEST (PH 2 – 12)

The setups in the table above are referential. The final setup for the dredges is determined upon studying the client's needs.



## THE DREDGE

### Jet Ring System

- On-barge horizontal, high pressure water pump
- Suction and Discharge hoses included
- Water flow: 60 m<sup>3</sup>/h
- Pressure: 6 bar – 7 bar


### Electric Control Panel

- Complete Control panel
- Connection for Power cable
- Regulates pump start-up with Soft starter
- Distributes Power to all components on the dredge.



### Electric Hoist

- Carefully move pump up and down
- Depth measuring pulley

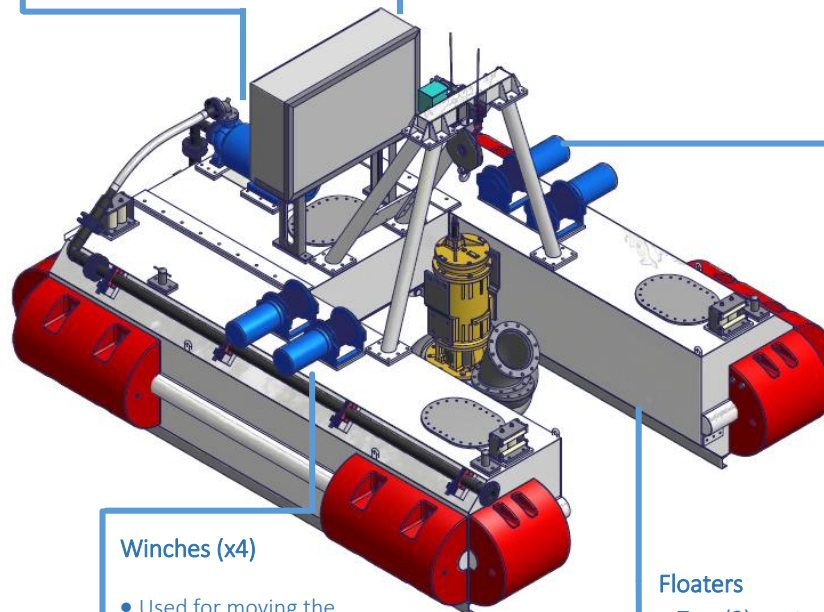

### Winches (x4)

- Used for moving the dredge
- Steel cables
- Optional propeller

### Floater

- Two (2) pontoons 4.5 m x 1 m x 1.25 m with central platform
- Small draft



## THE PUMP

### Jet-Ring System

- High pressure water jets used to rupture the material and have a higher solid concentration in the mixture
- Water Capacity: 20 m<sup>3</sup>/h – 200 m<sup>3</sup>/h
- Pressure: 6 bar – 7 bar
- Drive: On-barge Horizontal high pressure pump



### Pump

- Capacity: 150 m<sup>3</sup>/h – 700 m<sup>3</sup>/h
- Head: 70 - 20 m
- Discharge diameter: 100mm – 250mm
- Suction diameter: 545mm
- Impeller diameter: 400 mm
- Max. solid handling: 60 – 90 mm
- Speed: 1450 r.p.m.

### Remote Control

- Turn pump ON/OFF
- Jet-Ring ON/OFF
- Move pump up and down
- Move dredge sideways
- Emergency stop
- Display with working depth and power consumption

