

Electric pump

EL7.5

PUMP SPECIFICATIONS

Capacity [m ³ /h - (USGPM)]	58 - (255)
Head [m - (ft)]	12 - (38,7)
Impeller diameter [mm - (in)]/type	225 - (9)/4 blades opened
Hose adaptor diameter [mm - (in)]	100 - (4)
Cross section diameter [mm - (in)]	25 - (1)
Weight (without cable) [kg - (lbs)]	250 - (550)

ELECTRIC MOTOR

Power [kW-HP]	5.5-7.5
Voltage [V]/Current [A]	280-460/16.1-9.8
Phases/Poles/Frequency [Hz]	3/4/60
Speed [RPM]	1750
Insulationclass	H
Powercable 20m (IEC 60245- 4)	H07RN-F 4G10

MATERIALS

Casing	Spheroidal cast iron EN-GJS-500-7 (EN 1563)
Motor housing	Spheroidal cast iron EN-GJS-500-7 (EN 1563)
Wear parts	High chrome EN-GJN-HV600 (XCr18) (EN 12513)
Main shaft	High tensile steel 39NiCrMo3 (AISI 9840)



SEALS / LUBRICANT

Motor side seals	1 mechanical seal (silicon carbide in oil bath)
Impeller side seals	1 mechanical seal (silicon carbide in oil bath) + 4 lip seal (2 BUNA + 2 TPU)
Oil type	ISO 32

DIMENSIONS [mm - (in)]


H	W	D	F	H1	PG
920	435	435	415	550	100
(36.8)	(17.4)	(17.4)	(16.6)	(22)	(4)

PERFORMANCE CURVES

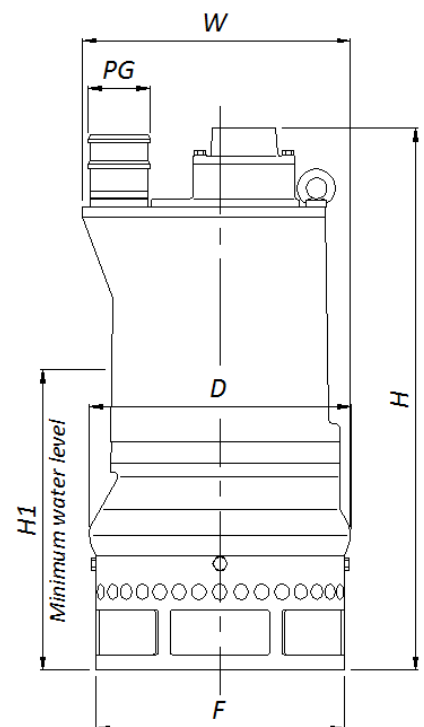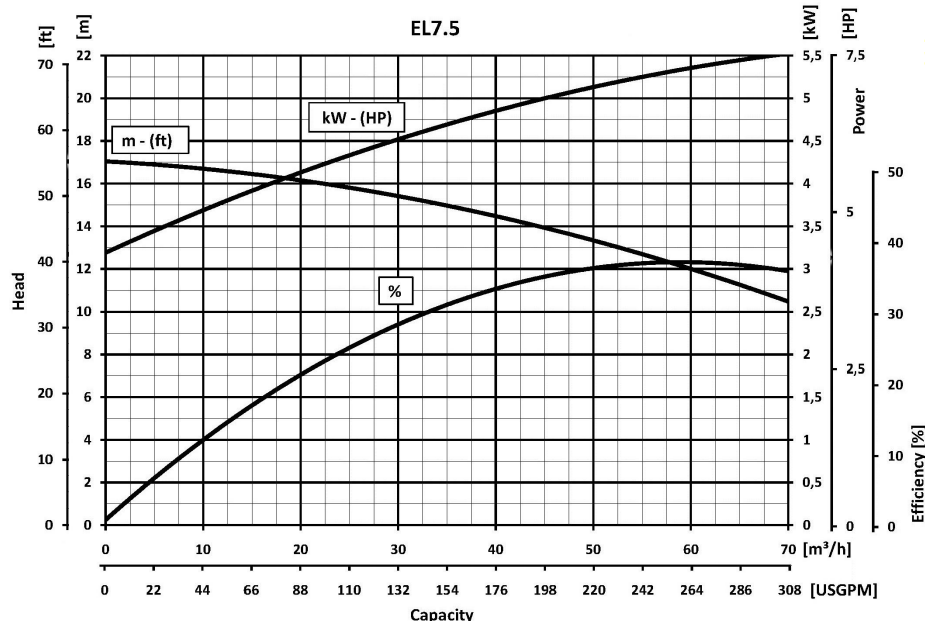

We reserve the right to make changes without notice

EL7.5

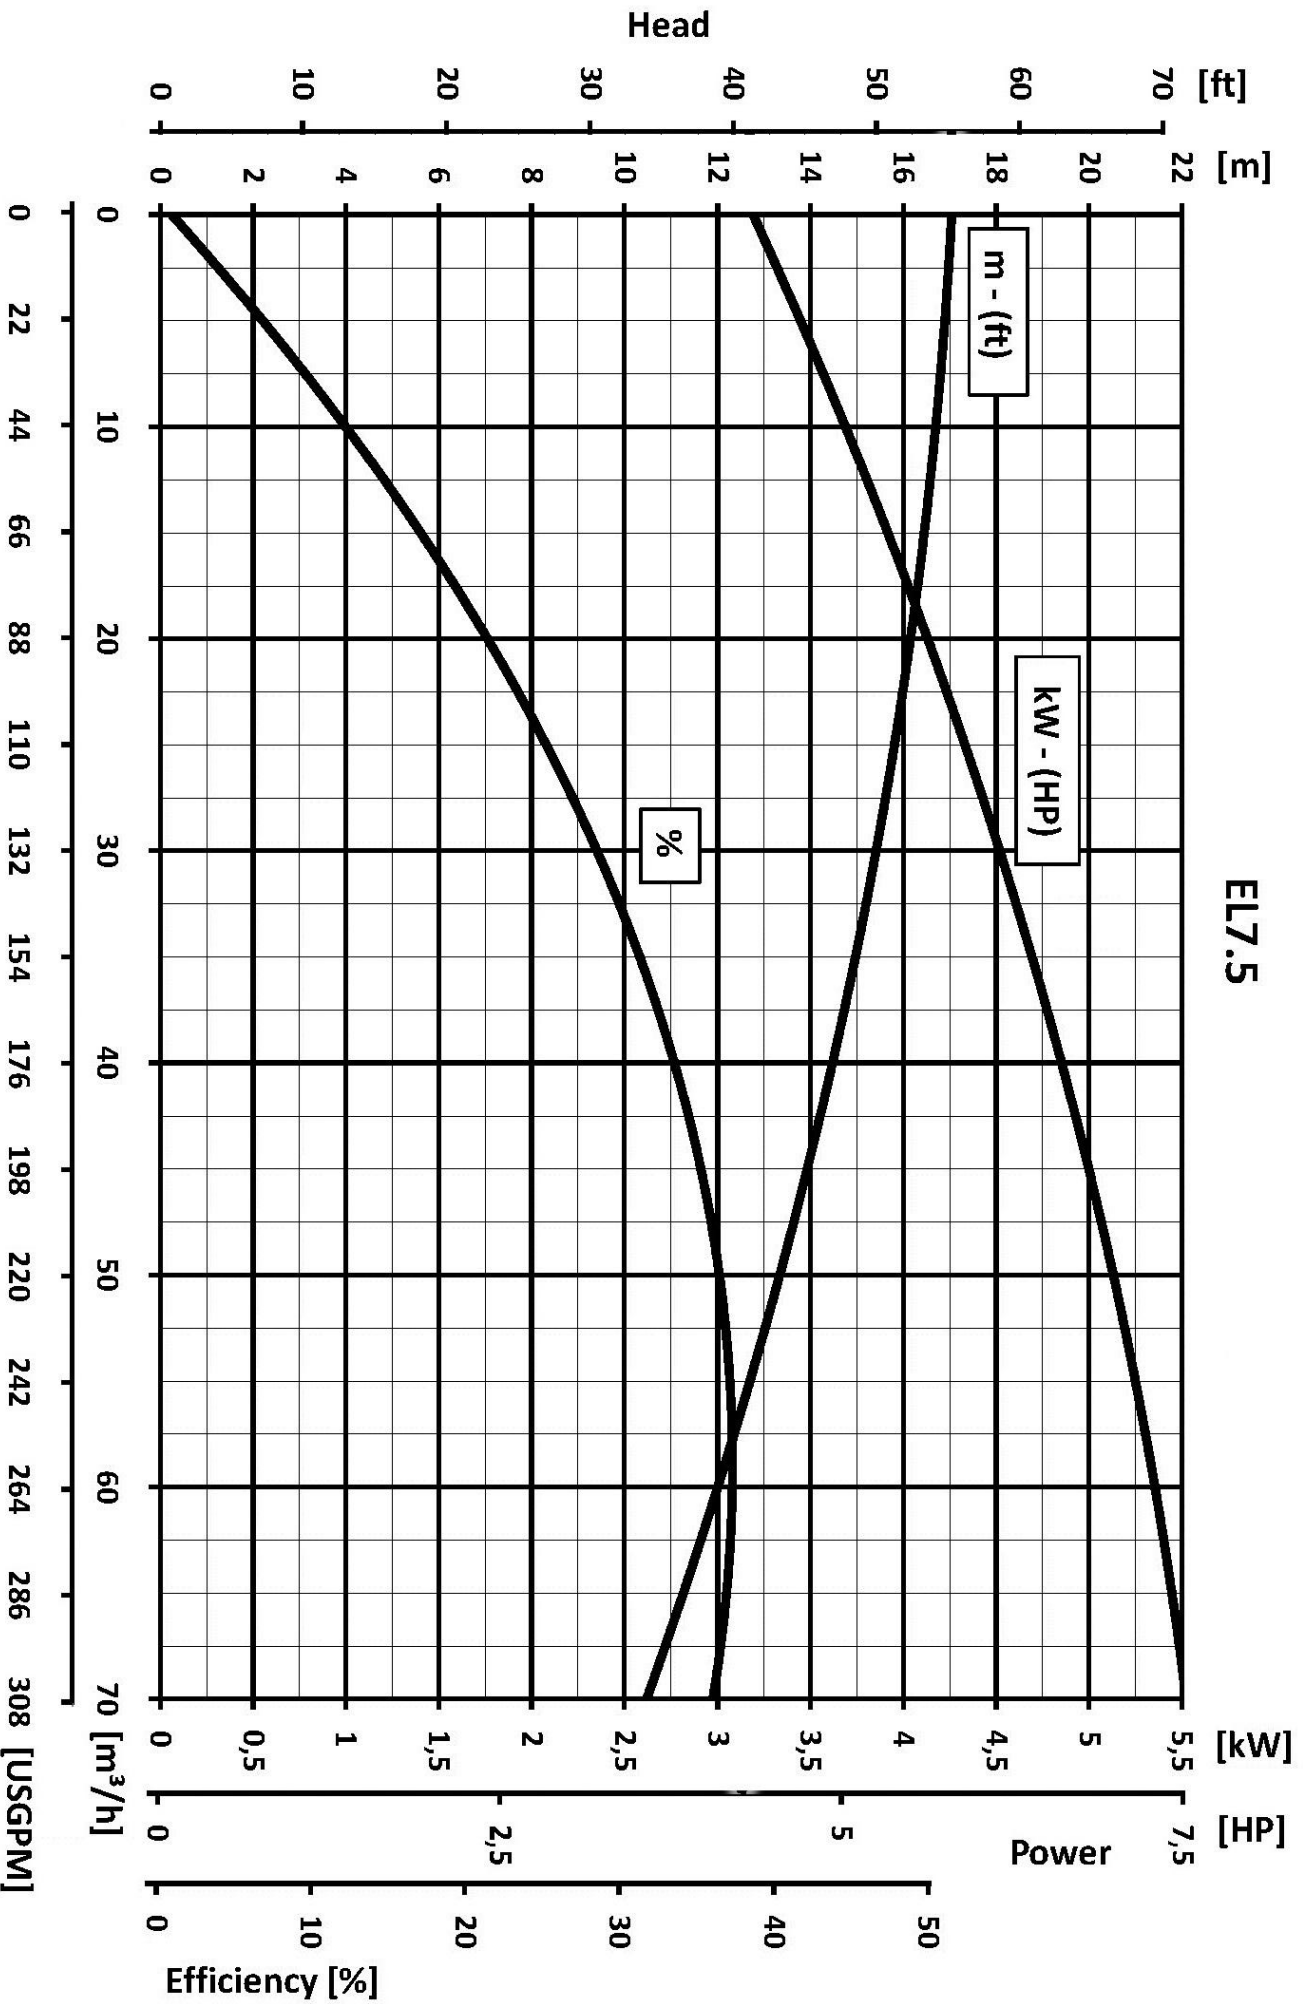

We reserve the right to make changes without notice